This Page Is Inserted by IFW Operations and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT.
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problem Mailbox.



COPY OF PAPERS ORIGINALLY FILED

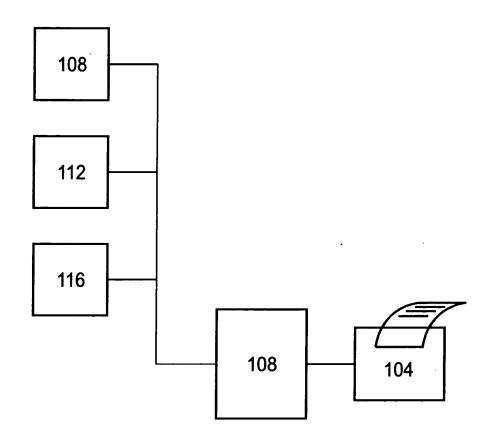


FIG. I

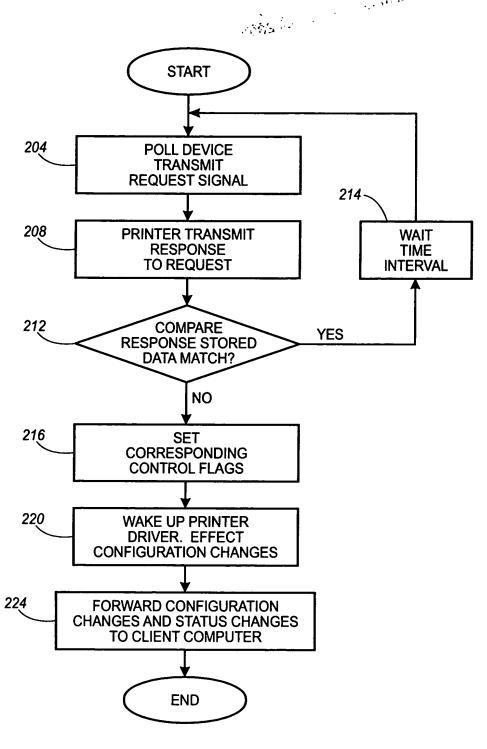


FIG. 2

The Thirt is





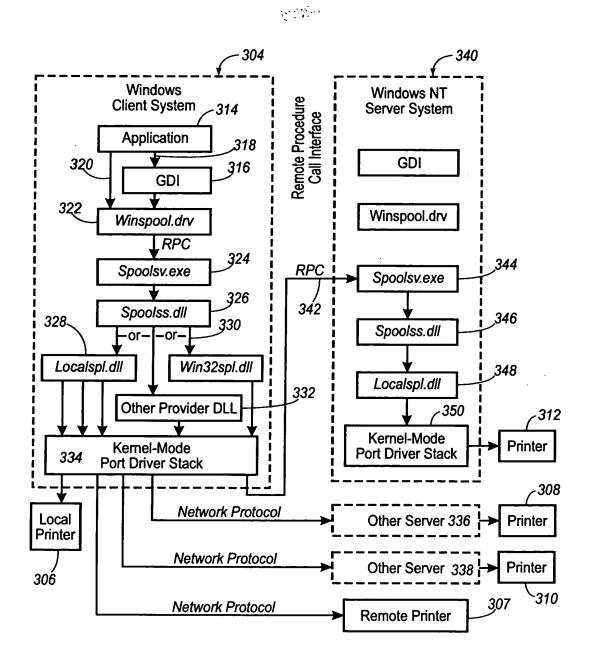


FIG. 3





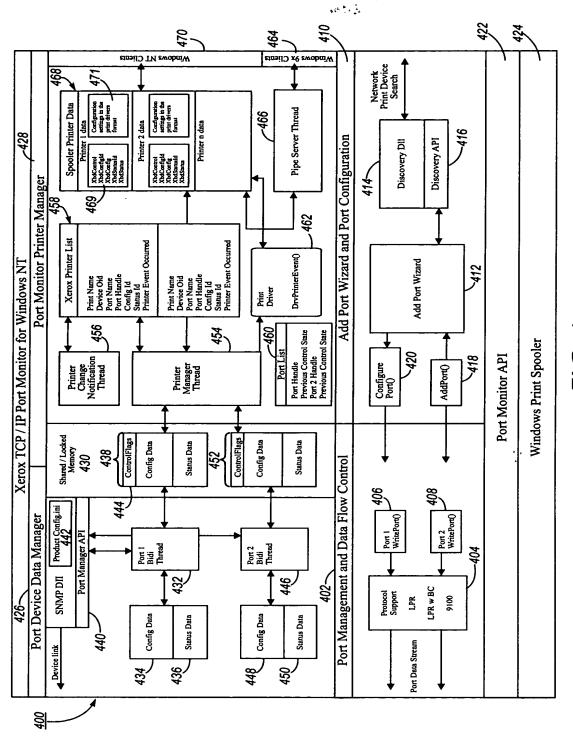

1.01327

All the



504 Completing Completing the Bi-Directional Port Setup You have created a port with the following characteristics: Ray's N40 Port 13.1.217.204 N24/N32/N40 LPR Port Name Printer Address Printer Type Protocal 506 LPA Queue Byte Counting Bi-Directional ISW Enabled Disabled Finish ≺ <u>B</u>ack Cancel 508

FIG. 5



COPY OF PAPERS ORIGINALLY FILED

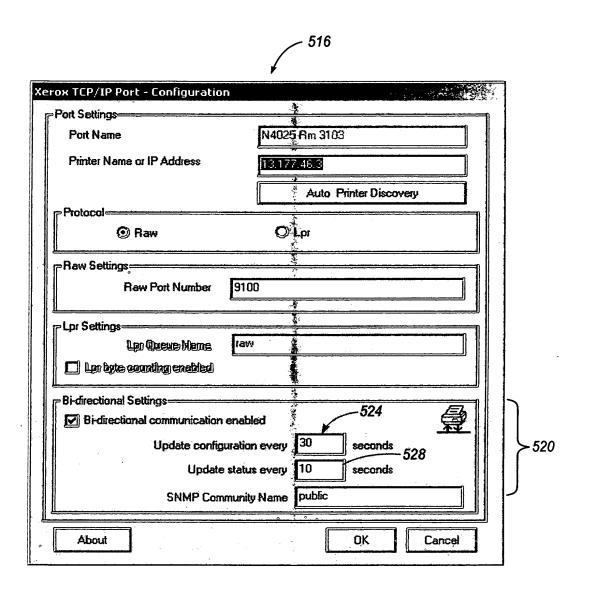


FIG. 6

ORIGINALLY FILED

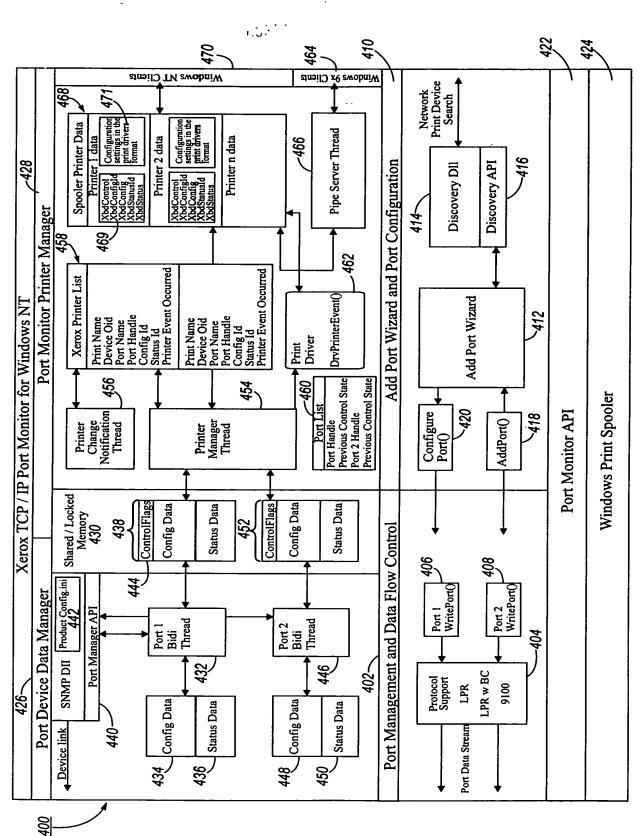


FIG. 4